





Thank you for purchasing this Autel tool. Our tools are manufactured to a high standard and — when used according to these instructions and properly maintained — will provide years of trouble-free performance.

Packing List

Main Unit	
MaxiVCI V150 Lite	

USB Type-C Cable	
Quick Reference Guide	




NOTE: For environmental reasons this package does not include a charger. This device can be powered with most USB power adapters and a cable with USB Type-C plug.

Getting Started




IMPORTANT: Before operating or maintaining this unit, please read these instructions carefully, paying extra attention to the safety warnings and precautions. Use this unit correctly and with care. Failure to do so may cause damage and/or personal injury and will void the limited product warranty.

1

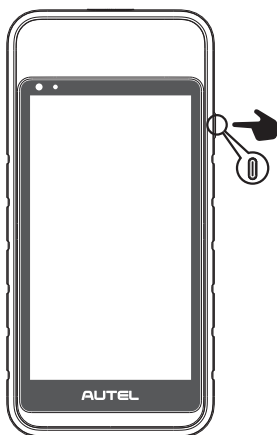


- Long press the **Power/Lock** button to turn on the tool.

2




- Scan the QR code above to visit our website at pro.autel.com.
- Create an Autel ID and register the product with its serial number and password, which can be found by tapping **Settings > About**.

3



- Insert the MaxiVCI V150 Lite into the vehicle's DLC, which is generally located under the vehicle dashboard.
- Turn the vehicle's ignition to the ON position.

4

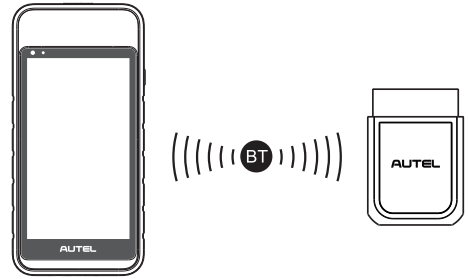

- Connect the tool with the MaxiVCI V150 Lite via Bluetooth to establish a communication.
- When the V150 Lite is properly connected to the vehicle and the tool, the VCI status button will display a green check mark, indicating the tool is ready to start vehicle diagnosis.



NOTE: The illustrations in this Quick Reference Guide are for reference only. The actual product may differ.